


Nx1 High Power Pump Combiner

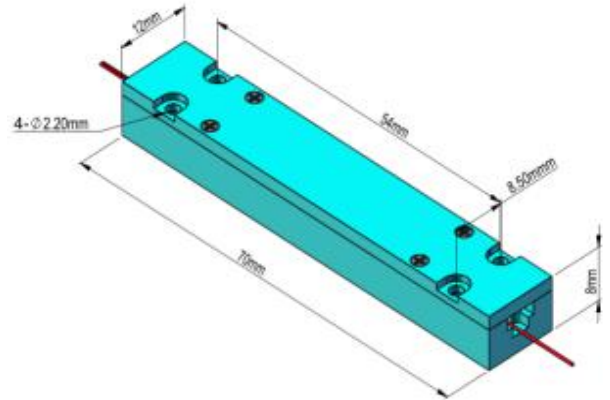

☆ Features

- High Transfer Efficiency
- Stable and Reliable

☆ Application

- High Power Fiber Laser
- High Power Fiber Amplifier

☆ Specifications

Port Configuration	3x1	4x1	7x1	19x1
Pump Wavelength	800~1000nm			
Pump Input Fiber	X/125 or 200/220		105/125 0.15NA/0.22NA or 200/220 0.22NA	
Output Fiber	Y/125 or 200/220		200/220 or Y/250 or 20/400	
Pump Efficiency	>95%		>90%	>90%
Total Power Handling	300w		350w	1800w
Package Dimension	Φ4x60mm, 70x12x8mm, other		70x12x8mm, 100x15x10mm, other	
Operating Temperature	0°C~+75°C			
Storage Temperature	-40°C~+85°C			

☆ Ordering Information

Device ID	Explain	Option
XX-XXX	Device type	XQ-PCMB
X	Port Configuration	3=3x1, 4=4x1, 7=7x1, 19=19x1 , Specified
X	Pump Wavelength	F=915nm, G=975nm , I=1064nm, O=1550nm, K=2000nm
X	Pump Fiber	A=105/125 NA:0.22 B=105/125 NA: 0.15 H=200/220 NA 0.22
X	Output Fiber	1=DCF6/125NA:0.14/0.4 2=DCF8/125NA:0.14/0.46 3=DCF10/125 NA:0.08/0.46 4=DCF20/125 NA:0.08/0.46 5=DCF20/250 NA:0.08/0.46 6=DCF30/250 NA:0.06/0.46 8=DCF25/250 NA:0.06/0.46 9=200/220 NA 0.22 O=20/400 NA:0.06/0.46
XX	Pigtail Length	08=0.8m,10=1.0m
X	Package Dimension	A=70x12x8mm B=100x15x10mm C=Φ4x60mm

Example: XQ-PCMB-1-F-A-1-1-08-A

Address: 5F, Building 2, Invengo Industrial Park, TongGuan Road, GongMing Street, GuangMing New District ShenZhen, China

Website: www.szoscom.com

Phone:+86-755-83118073

Fax: +86-755-83272391

E-mail: sales@szoscom.com